

# COB CCT strip



Flexible COB LED strip (Step length: 26.31mm), 14W per meter, with 3M adhesive tape on the back for easy installation. Color adjustable from 2600K to 6700K. NO MOQ limited. 180° beam angle. Good color restoration with CRI>90.


## Features:

- Ip20 rating
- No hotspots
- High lumen output (up to 1200lm/m)
- Wide viewing angle (150°)
- Storage Temperature: -20°C~75°C
- Operating Temperature: -20°C~60°C
- Humidity tolerance: 40-70% RH


## Application:

- Commercial building
- Residential building
- Entertainment lighting
- Hotels
- Signages


## Size

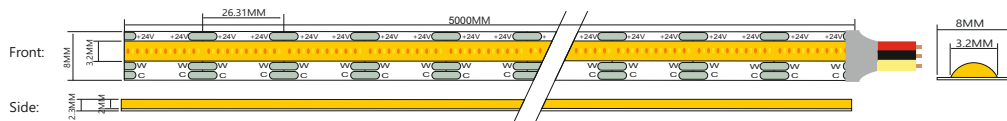

## Connection

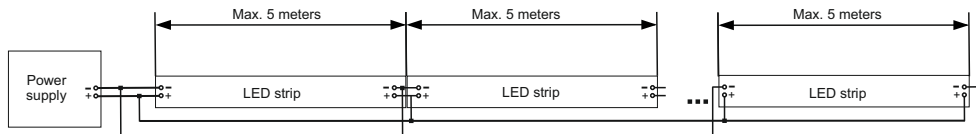

## Maximum Flexibility Precaution:



**NOTE:** DO NOT BEND TO A RADIUS OF LESS THAN 0.59 INCH




**NOTE:** SHARP BENDING ISN'T ALLOWABLE



**NOTE:** DO NOT TWIST MORE THAN 90° OVER THE LENGTH OF ONE 24V SEGMENT/ TWO 12V SEGMENTS (4" TOTAL LENGTH)




**NOTE:** DO NOT HORIZONTAL BEND TO A RADIUS OF LESS THAN 18 INCH



**NOTE:** DO NOT AXIAL BEND TO THE HEIGHT OF MORE THAN 19.8mm WITHIN 0.78 INCH SEGMENT

## Cutting and Connecting Instruction:

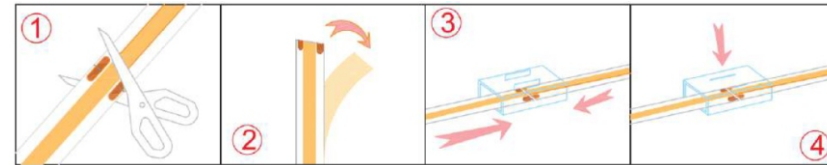

1. Field cut the light strip at everywhere with soldering pads.
2. Peel out the 3M adhesive tape
3. Put together the 2 light strips and the connector, AB-TSC-06-2
4. Make sure the connector fastens the lights

## Packaging information

Packaging	in a coil	In a box	In a box
Number	10 m	100 m	1000 m
Weight	0,2 kg	2 kg	20 kg

## Technical information

Available colors: ○

Power	14,0W/m
Light flux	1260 lm

Crystal type	COB
Operating voltage	24V DC
Glow temperature	○2600K - 6700K
Protection class	IP 20
Working temperature	-30 +50 °C