

X-line X-4



- New generation of innovative solution for narrow light boxes with a depth of 100 - 150 mm.
- Only 4 modules due to professional optics per 1 sq. m of the product is enough for uniform illumination.
- Starting from a depth of 100 mm, the distance between the centers of the modules is 400 mm.
- Need 50% LESS modules and power consumption per sq. m.
- Equipped with new generation 3030 LED chip with high efficiency
- White color option available: 6500K


Installation:

- Narrow light boxes
- Recommended installation depth 100-150 mm


Features and Benefits:

- **The smallest number of modules per sq. m on the market!**
- Power consumption - only 16 W per sq. m
- System efficiency up to 95 lm/W
- Maximum Tj temperature < 80°C
- **LM80** International LED Certificate
- Aluminum board and special thermal tape
- High IP66 protection
- Luminance drop <30% after 60,000 hours.
- **Warranty 5 years**

Dimensions

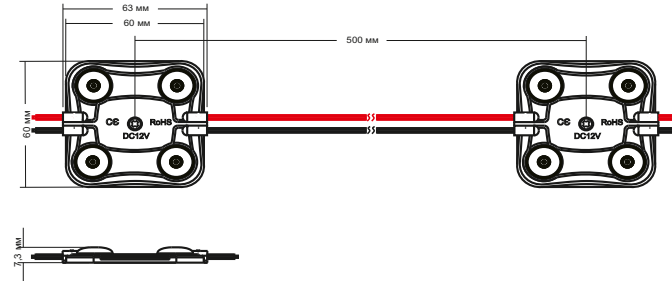

Beam Angle

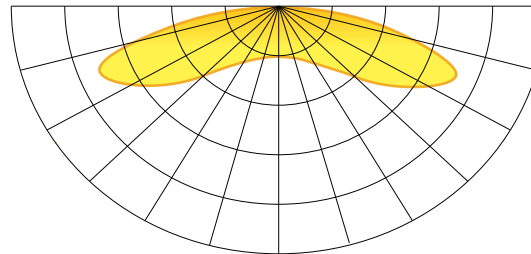

Scattering angle: 175°

Technical information

Available colors:	<input type="radio"/>
Power	4,0W
Light flow	380 lm
Crystal type	3030
Working voltage	12VDC
Colorful temperature	<input type="radio"/> 6500 K
Scattering angle	175°
Protection class	IP 67
Working temperature	-30 +50 °C

Packing information

Package	In chain	In the package	In the box
Quantity	10 PCS	50 PCS	600 PCS
Weight	0,5 kg	2,5 kg	30 kg

Illumination table

Installation depth	Installation step by module centers	Quantity per 1 m ²	Power per 1 m ²
100 mm	400 mm	4 PCS	16 W
120 mm	500 mm	4 PCS	16 W
140 mm	500 mm	4 PCS	16 W
150 mm	500 mm	4 PCS	16 W